

Infinity Corrected Optical System

MT8000 SERIES

UPRIGHT BRIGHTFIELD & SIMPLE POLARIZATION METALLURGICAL COMPOUND MICROSCOPES



METALLURGICAL SERIES

MT8000

MEIJITECHNO



METALLURGICAL COMPOUND MICROSCOPES


UPRIGHT BRIGHTFIELD COMPOUND SYSTEMS WITH INCIDENT LIGHT

SERIES

THE MEIJI TECHNO MT8000 SERIES DELIVERS EXCEPTIONAL CLARITY AND PRECISION FOR METALLURGICAL ANALYSIS, FEATURING ICOS OPTICS, DURABLE CONSTRUCTION, AND BRIGHT LED ILLUMINATION—IDEAL FOR RESEARCH, INSPECTION, AND INDUSTRIAL APPLICATIONS.

The Meiji Techno MT8000 Series stands out as an exceptional choice for metallurgical applications due to its superior optical performance, precision engineering, and durable construction. Built around Meiji's renowned Infinity Corrected Optical System (ICOS), it delivers crystal-clear, high-contrast images essential for examining metal structures, grain boundaries, surface treatments, and other critical features with outstanding detail and accuracy. Its Plan Epi objectives ensure flat, distortion-free fields of view across the entire image—ideal for research, quality control, and industrial inspection environments.

In addition to optical excellence, the MT8000 Series combines ergonomic design, reliability, and adaptability. The ceramic-coated flat-top stage resists wear and corrosion, while smooth X-Y controls allow precise sample manipulation. Its LED or halogen illumination options provide stable, bright, and uniform lighting for reflective materials, ensuring consistent results even during long observation sessions. Manufactured in Japan and backed by a limited lifetime warranty, the MT8000 Series offers a professional-grade balance of performance, durability, and long-term value—making it a trusted tool for metallurgical laboratories and industrial inspection facilities worldwide.

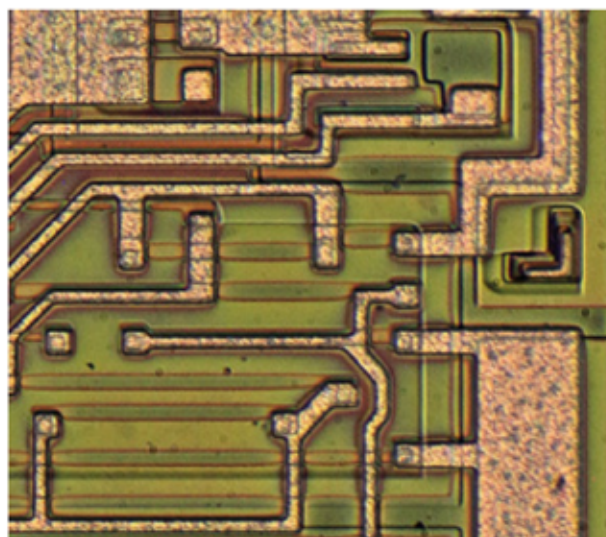

BRIGHTFIELD & SIMPLE POLARIZATION MODELS - QUINTUPLE NOSEPIECE (HALOGEN)

MODEL	BODY	ILLUMINATOR	EYEPIECES	OBJECTIVES	STAGE	CONDENSER
MT8000H	Binocular	VERTICAL KOEHLER 6V 30W HALOGEN INCIDENT ILLUMINATOR WITH TRANSFORMER IN SEPARATE CASE	SWH 10X F.N. 22 (O.D. 30mm) PAIRED	INFINITY CORRECTED OPTICAL SYSTEM F = 200mm	CERAMIC COATED FLAT-TOP X-Y MOVEMENT RIGHT HANDED DROP DOWN COAXIAL CONTROLS	SUBSTAGE CONDENSER WITH IRIS DIAPHRAGM, DOVETAIL MOUNT
MT8000EH	Ergonomic Binocular					
MT8100H	Trinocular			PLAN EPI 5X		
MT8100EH	Ergonomic Trinocular			PLAN EPI 10X PLAN EPI 20X PLAN EPI 50X		

BRIGHTFIELD & SIMPLE POLARIZATION MODELS - QUINTUPLE NOSEPIECE (LED)

MODEL	BODY	ILLUMINATOR	EYEPIECES	OBJECTIVES	STAGE	CONDENSER
MT8000L	Binocular	VERTICAL KOEHLER LED ILLUMINATOR WITH TRANSFORMER IN SEPARATE CASE	SWH 10X F.N. 22 (O.D. 30mm) PAIRED	INFINITY CORRECTED OPTICAL SYSTEM F = 200mm	CERAMIC COATED FLAT-TOP X-Y MOVEMENT RIGHT HANDED DROP DOWN COAXIAL CONTROLS	SUBSTAGE CONDENSER WITH IRIS DIAPHRAGM, DOVETAIL MOUNT
MT8000EL	Ergonomic Binocular					
MT8100L	Trinocular			PLAN EPI 5X		
MT8100EL	Ergonomic Trinocular			PLAN EPI 10X PLAN EPI 20X PLAN EPI 50X		

"Models MT8000H, MT8100H, MT8000L, and MT8100L are also available with an *Extended Working Distance Binocular Head featuring 50mm Z-axis travel.*"



for **METALLURGICAL
LABORATORIES**

ATTACHABLE
DIGITAL CAMERA PORT



EYEPIECES

Paired HWF 10X/20mm
F.O.V. 30.0mm with
diopter adjustment

**POLARIZER
SLIDER**

Easily insert and remove
the polarizer filter from the
light path. Enables
Polarized Light Microscopy

OBJECTIVES

Reverse facing nosepiece
with Infinity Corrected Plan
EPI 5X, 10X, 40X and 50X
N.A. 1.25, W.D. 0.19mm,
180mm tube length

STAGE

191mm x 126mm Mechanical
stage with X - Y movement of
100mm x 100mm (4" x 4").

**IRIS
CONDENSER**

Substage condenser with iris
diaphragm, dovetail mount

FILTER SLOT

20mm diameter filter slit

**IRIS APERTURE
DIAPHRAGM**

Controls aperture angle of
light cone

**ILLUMINATION
ADJUSTMENT**

Variable Intensity knob increases or
decreases the intensity of the light source.

ON/OFF SWITCH

Main power control for the light source

VIEWING HEAD

Binocular 30° inclined tube
or or Trinocular Viewing
Head 30° inclined

ILLUMINATION

Vertical Koehler LED or Halogen
illuminator, with lamphouse
centering screw, clear blue, clear
green N.D. 25 neutral density
filter and polarizing filters in
metal mounts.

BEAM SPLITTER

Beam splitter 80/20 split
ratio, 80% light is directed
to the camera and the
remaining light 20% going
to the eyepieces

**INTEGRATED
AUTOMATIC VOLTAGE
SENSING POWER SUPPLY
WITH LOCALIZED
POWER CORDSET**

**MECHANICAL
DROPDOWN**

Ergonomic X-Y right
handed stage dropdown
coaxial control

**FOCUSING
ADJUSTMENT**

Coaxial coarse and 200 μ m
fine adjustments, 2 μ m
precision, Friction adjustment.
"Slip-clutch" system protects
against over-focusing

**REFLECTED
LAMPHOUSE CONTROL
WITH LED LIGHT**

DIGITAL CAMERAS FOR MICROSCOPY


CAM® V1700 (M)	Monochrome 8.3 MP 1/1.7" CMOS 44 f/s USB 3.0 Digital camera with resolution 3840x2160 pixels
CAM® V3400	Color 5.1 MP 2/3" CCD 75 f/s USB 3.0 Digital camera with resolution 2464x2056 pixels
CAM® V3200	Color 3.2 MP 1/1.8" CMOS 120 f/s USB 3.0 Digital camera with resolution 2064x1544 pixels
CAM® V1400	Color 20 MP 1" CMOS 15 f/s USB 3.0 Digital camera with resolution 5472x3648 pixels
CAM® V1200 (C) HD	Color digital HD camera with monitor 6 MP 1/2.8" CMOS USB 3.0 Resolution 3264x1836 pixels Built-in 11.6" LCD screen Video record: 1080p high definition format



CAM® V1700 (M)



CAM® V1200 (C) HD



CAM® V1400



C MOUNT ADAPTERS

MA151/35/03	C" mount adapter with 0.3X lens
MA151/35/04	C" mount adapter with 0.45X lens
MA151/35/15	C" mount adapter with 1.0X lens
MA151/35/20	C" mount adapter with 0.7X lens
MA151/35/25	C" mount adapter with 2.5X lens
MA151/35/30	C" mount adapter with 1.5X lens
MA151/MT05	C" mount adapter with 0.5X lens



MA151/35/05 C-Mount
Adapter with 0.5X lens

COMPONENTS AND ACCESSORIES FOR MT8000 SERIES

EYEPIECE MICROMETERS (25MM DIAMETER) FOR USE WITH MA817 OR MA859 EYEPIECE)

MA523	Eyeiece micrometer, cross-line reticle, 25mm diameter
MA506	Eyeiece micrometer, 10mm line divided into 100 units, 25mm diameter
MA509	Eyeiece micrometer, 5mm line divided into 100 units, 25mm diameter
MA510	Eyeiece micrometer, 10mm square divided into 100 parts, each square 80.00 1.0mm, 25mm diameter
MA542	Eyeiece micrometer, cross-line reticle with 0.1mm graduations, 25mm diameter
MA738	Eyeiece micrometer, for grain sizing in steel, 25mm diameter

EYEPIECE MICROMETERS (19mm diameter for use with MA818 or MA819 eyepieces)

MA279	Eyeiece micrometer, cross-line reticle, 19mm diameter
MA280	Eyeiece micrometer, 10mm line divided into 100 units, 19mm diameter (linear)
MA281	Eyeiece micrometer, 5mm line divided into 100 units, 19mm diameter (linear)
MA539	Eyeiece micrometer, cross-line reticle with 0.1mm graduations, 19mm diameter

STAGE MICROMETERS

MA292	Metal stage micrometer, 1mm divided into 100 units, 0.01mm (linear) (Optional)
--------------	--



MT8100+CAM V1200 HD+MA151/35/05

EYEPIECE MICROMETER

for grain sizing in steel (25mm)



MA738




MA523



MA506



MA509



MA542



MA292

1mm divided into 100 parts

COMPONENTS AND ACCESSORIES FOR MT8000 SERIES

The Items marked with a Star (★) are included

VIEWING HEAD (without eyepieces)

- MA815** ★ Binocular head - Siedentopf type, I.P. adjustment 53mm to 75mm, graduated diopter on left eyetube (30.0mm I.D. eyetube). Inclined at 30°
- MA816** ★ Trinocular head - Siedentopf type, I.P. adjustment 53mm to 75mm, graduated diopter on left eyetube (30.0mm I.D. eyetube). Inclined at 30°
- MA957** ★ Ergonomic tilting binocular head - Adjustable vertically from 10° to 50° (Included in MT7000EH, MT7100EH, MT7000EL and MT7100EL models)
- MA979** Trinocular head - Siedentopf type, erect image with sliding 0/100 beam splitter, inclined at 30°, I.P. adjustment 53mm to 75mm, graduated diopter on left eyetube.

EYEPIECES

- MA817** ★ SWH 10X, widefield, high eyepoint eyepiece (each) Field No. 22 (MA817 accepts 25mm diameter reticle)
- MA818** SWH 15X, widefield, high eyepoint eyepiece (each) Field No. 16 (MA818 accepts 19mm diameter reticle)
- MA819** SWH 20X, widefield, high eyepoint eyepiece (each) Field No. 12 (MA819 accepts 19mm diameter reticle)
- MA859** SWF 10X-F, focusing widefield, high eyepoint eyepiece (each) Field No. 22 (MA859 accepts 25mm diameter reticle)

BRIGHTFIELD PLAN EPI OBJECTIVES

- MA870** ★ Plan Epi Objective 5X, N.A. 0.10, W.D. 20.9mm, F.N. 24
- MA871** ★ Plan Epi Objective 10X, N.A. 0.25, W.D. 7.7mm, F.N. 24
- MA872** ★ Plan Epi Objective 20X, N.A. 0.40, W.D. 5.6mm, F.N. 24
- MA873** ★ Plan Epi Objective 50X, N.A. 0.75, W.D. 0.38mm, F.N. 24
- MA874** Plan Epi Objective 100X, N.A. 0.90, W.D. 0.37mm, F.N. 24 (Optional)

BRIGHTFIELD LWD PLAN EPI OBJECTIVES (LONG WORKING DISTANCE)

- MA920** LWD Plan Epi Objective 20X, N.A. 0.40, W.D. 11.0mm, F.N. 24 (Optional)
- MA921** LWD Plan Epi Objective 50X, N.A. 0.55, W.D. 7.5mm, F.N. 24 (Optional)

ILLUMINATOR (HALOGEN) *INCLUDED ON HALOGEN MODELS ONLY

- MA927** Vertical Koehler illuminator, 6V 30W Halogen lamp, with clear blue, (T.S.L/DISC) clear green N.D. 50 neutral density filter and polarizing filters in metal mounts. 100V~240V (Powered by transformer built into MT7000 Series stand)

- MA927/05** Transformer for MA927 in separate case (Input 100V~240V, Output 6V 30W)

ILLUMINATOR (LED) *INCLUDED ON LED MODELS ONLY

- MA927/L** Vertical Koehler LED illuminator, with clear blue, N.D. 50 neutral density filter and polarizing filters in metal mounts. Auto voltage sensing AC adapter built into stand, 100V~240V.

- MA927/05L** Auto voltage sensing power supply for MA927/L provided in separate case (Input 100V~240V) (Included in LED models)

FILTERS

- MA475/05★** Blue clear filter, 20mm diameter filter in metal mount, fits 25mm filter slot.
- MA476** ★ Green clear filter, 20mm diameter filter in metal mount, fits 25mm filter slot (Included in all Halogen models).
- MA774** ★ N.D. 50 neutral density filter, 20mm diameter filter in metal mount, fits 25mm filter slot.
- MA497** ★ Polarizing filter, 20mm diameter filter in metal mount, fits 25mm filter slot

STAGE *INCLUDED IN ALL MODELS

- MA942** ★ Ceramic coated flat-top stage, 191mm x 126mm, 100mm x 100mm X - Y movement, right hand drop down coaxial controls and 94.5mm diameter clear glass stage plate.

CONDENSER

- MA910/05** *Substage condenser with iris diaphragm, dovetail mount.

BULBS AND FUSES (HALOGEN)

- MA326** Spare bulb 6V 30W halogen lamp for MT7000 and MT7100.
- MA327** Spare fuse 3A for halogen Illuminator for MT7000 and MT7100.
- LED/SP-1** Spare bulb 5W for LED illuminator for MT7000L and MT7100L.
- MA929** Spare fuse 0.5A for LED illuminator for MT7000L and MT7100L.

POWER CORDS


- MA809/10★** Removable AC Electric cord with plug for 115V Models (Included in all 115V models)
- MA809/20** Removable AC Electric cord with plug for 115V Models (Included in all 115V models)

CARRYING CASE

- MT-PEL** Pelican case with foam insert 21 ½ (L) x 16 ½ (W) x 12 ½ (D) for ML/MT/EM models with portable pullout handle and wheels for protection against vibration and shock (Optional)

MISCELLANEOUS

- MA906** ★ Eyeshield for MA817 SWH10X eyepiece (each)
- MA701/05★** Dust cover for all MT7000 Series microscopes
- MA701AS** Anti-static and washable dust cover for MT4000, MT5000, MT7000, MT6100, MT6500, MT-50, MT-60, 22" x 21" size, blue color

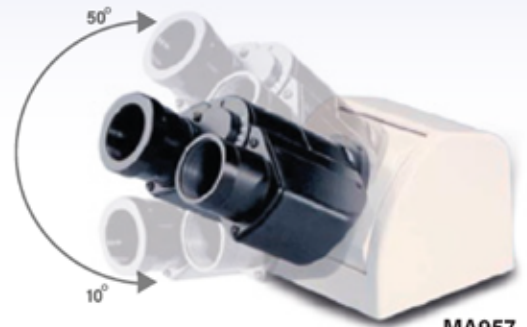

MA957
ERGONOMIC HEAD (Tilts 10° to 50°)



MA927
VERTICAL KOEHLER ILLUMINATOR WITH HALOGEN LAMP 6V, 30W AND FILTERS



MA873
PLAN EPI OBJECTIVE 50X (W.D.0.38MM)



MT-PEL
(OPTIONAL) PELICAN CASE WITH FOAM INSERT 21 ½ (L) X 16 ½ (W) X 12 ½ (D)



For further information
about the MT8000 Series,
scan this QR code.



CUSTOMER SUPPORT (U.S.A Based) 1-(800) 832-0060 (P.S.T.)

• **Weight:** 30.8 lbs (13.6 kg) • **Box Size:** 16 x 14 x 21 inches • **Footprint:** 263mm (D) x 176mm (W) • **Manufactured:** 100% MADE IN JAPAN

MT8000 SERIES MICROSCOPES

"Your trusted tool for metallurgical laboratories and industrial inspection facilities worldwide."

Specifications and design subject to change without notice for improvements

MEIJI TECHNO CO.,LTD.

322-1, Chikumazawa Miyoshi-machi,
Iruma-gun Saitama 354-0043, Japan
Phone: (0)49-259-0111 Fax: (0)49-259-0113
Email: meiji@meijitechno.co.jp
www.meijitechno.co.jp

MEIJI TECHNO AMERICA

591 Division St., Campbell CA 95008
Toll free USA: 800-832-0060
Phone: 408-226-3454
Email: admin@meijitechno.com
www.meijitechno.com

MEIJI TECHNO EUROPE

Brown-Boveri-Straße 6, B17-1
2351 Wiener Neudorf, Austria
Phone: +43 (0) 2236 892465
Email: news@meijitechno-europe.com
www.meijitechno-europe.com

MEIJITECHNO

